

GIO: Generating Efficient Matrix and Frame Readers for Custom Data Formats by Example

June 18–23
Seattle, WA, USA

Saeed Fathollahzadeh^{1,2}
Matthias Boehm³



**SIGMOD
PODS
2023**

Motivation

- Data formats vary in structure, syntax, semantics, and compression
Examples: CSV, JSON, XML, Parquet, ORC, HDF5, FITS, etc.
- Existing systems have limited support for custom formats
- Custom readers require low-level programming and system knowledge
- Custom readers are not portable across systems and languages

➔ Having state-of-the-art readers isn't enough:
Is there an efficient and automatic way to get around?

Problem of Custom Data Formats


Custom data formats originate from systems and machines, whose data representation was not designed for data **exchange** and **interoperability**

- Such data formats include flat or nested structure
- Optional key or positional attributes
- Multiple custom delimiters or prefixes
- Potentially multi-line records
- Undocumented semantics of attribute sequences
- Co-appearances and repeating groups of attributes

Examples: semiconductor manufacturing, smart grid data management, paper production, and waste recycling


Is there an automatic way to get around?

Today:

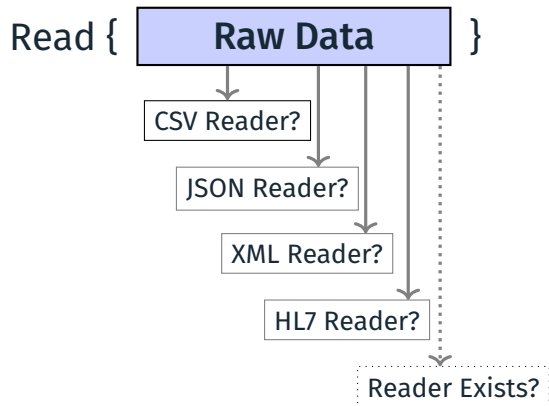


Is there an automatic way to get around?


Today:

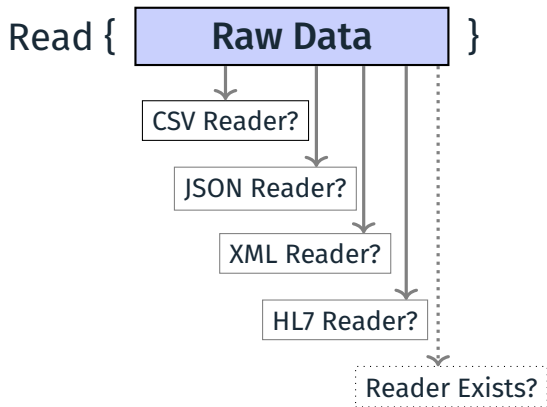

GIO: Generating Efficient Readers

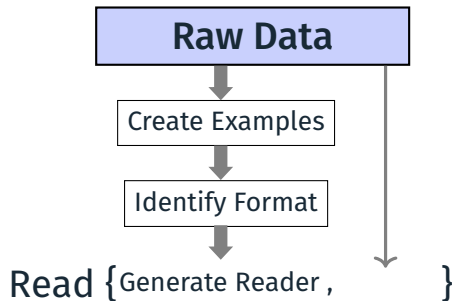

SystemDS I/O Gen API

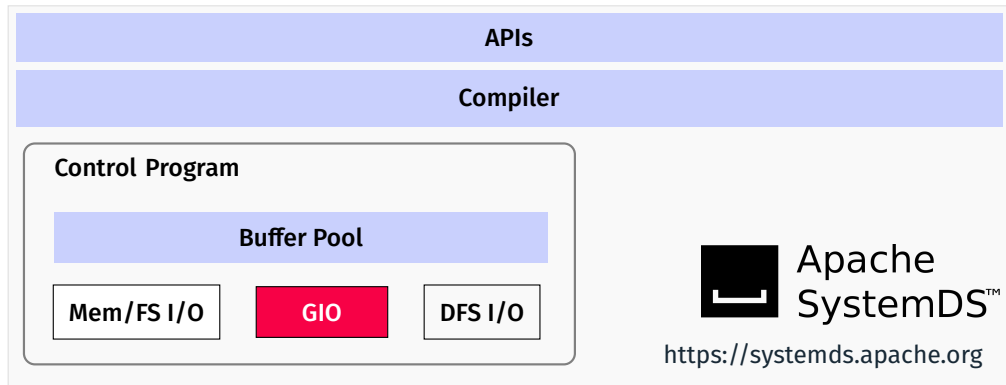

HL7



LibSVM, AMiner, MatrixMarket, ...

GIO's Parameters

Given a custom text-based dataset **D**, and user-provided examples of **raw** and **target data**:

- **Sample Raw (S) Input:** Let $S = \{S_1, S_2, \dots, S_l\}$ be a list of input strings (i.e., selected rows of the input dataset D).
 - **Sample Matrix/Frame (F) Input:** Let $F = \{F_1, F_2, \dots, F_n\}$ be a sample matrix or frame, corresponding to S with n records.
- ➔ our goal is to generate a matrix or frame reader for reading the full dataset and other data of this format.

Example Parameters

```
#index 2015101 ← beginning of record #1
#* NoDB: efficient query execution on raw data files
#@ Ioannis Alagiannis; Renata Borovica; Anastasia Ailamaki
#o EPFL Switzerland; EPFL Switzerland; EPFL Switzerland
#t 2015
#c VLDB Conference
#% ... unlimited set of references
#! As data collections become larger and larger, data loading evolves to a major bottleneck. ...

#index 2019102 ← beginning of record #2
#* Pangea: Monolithic Distributed Storage for Data Analytics
#@ Jia Zou; Arun Iyengar; Chris Jermaine
#o Rice University; Rice University; Rice University
#t 2019
#c VLDB Conference
#% ... unlimited set of references
#! Storage and memory systems for modern data analytics are heavily layered, managing shared ...


#index 2018103 ← beginning of record #3
#* Filter Before You Parse: Faster Analytics on Raw Data
#@ Shoumik Palkar; Firas Abuzaid; Matei Zaharia
#o Stanford InfoLab; Stanford InfoLab; Databricks Inc
#t 2018
#c VLDB Endowment
#% ... unlimited set of references
#! Exploratory big data applications often run on raw unstructured or semi-structured data ...
```

Sample Raw (S)


$$F = \begin{bmatrix} \#col_1 & \#col_2 & \#col_3 & \#col_4 \\ 2015101 & Ioannis Alagiannis & Renata Borovica & Anastasia Ailamaki \\ 2019102 & Jia Zou & Arun Iyengar & Chris Jermaine \\ 2018103 & Shoumik Palkar & Firas Abuzaid & Matei Zaharia \end{bmatrix}$$

Sample Frame (F)


GIO Overview

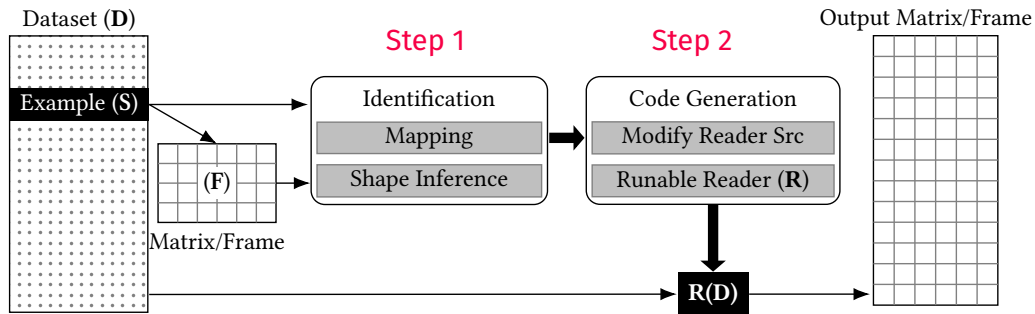

Step 1: Mapping Identification

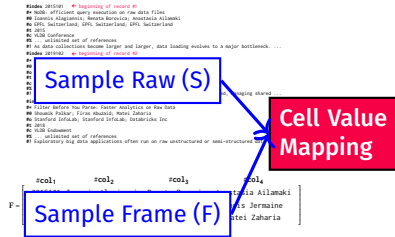

Step 1: Mapping Identification

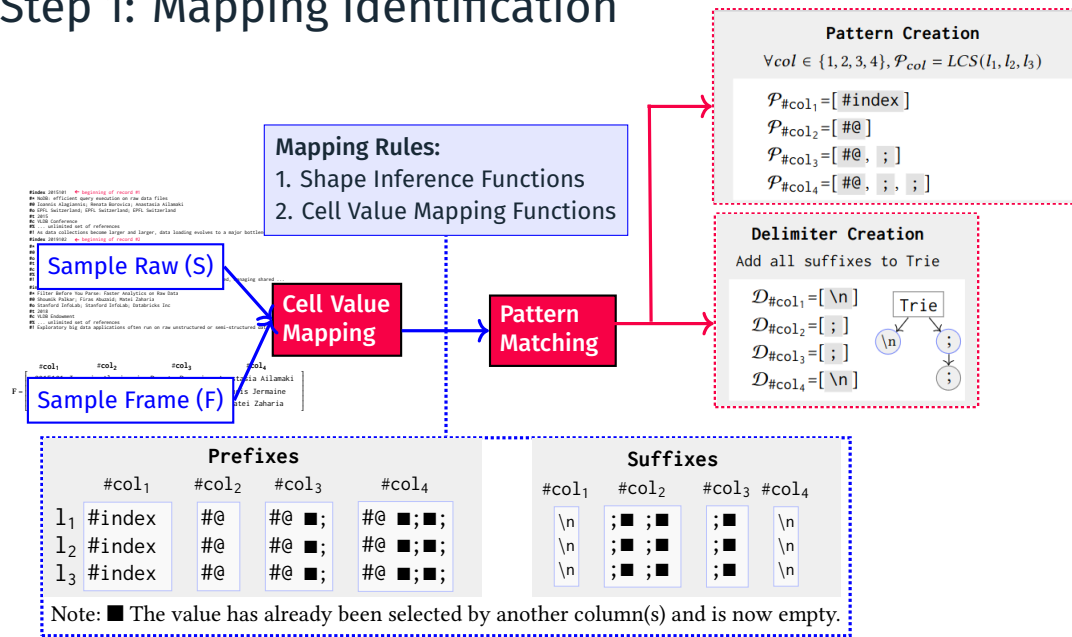

Step 2: Code Generation

- Composed according to the passed mapping rules.
- Template-based Code Generation: **parsing primitives, conditions, path expressions, and value indexing:**

- **Code Templates:**

- pre-pass for obtaining additional metadata from data
- inferring the dimensions
- iterate over records of the raw dataset

- **Indexing Code:**

- **Row Indexing Code:** determine the number of rows
- **Column Index and Value Code:** code gets column info and values

- **Cell Value Code:**

- **Cell Value by Nested Conditions**
- **Cell Value by Sequential String Matching**
- **Cell Value by Regular Expressions**

Overview of GIO Code Templates and Code Generation

GenericTemplate(\mathcal{R} , C , \mathcal{V})

```
1: [srcInitRow, srcRow] = GenerateRowC
2: [srcInitCol, srcCol] = GenerateColC
3: src = " InitFile();" +
4: " FrameBlock ReadBlock( Buffer
5: " pro = Estimation(br,  $\mathcal{R}$ ,  $C$ ,
6: " FrameBlock fb = new FrameBl
7:   srcInitRow + // row pre-
8:   srcInitCol + // col pre-
9: " for each (record r in br) {
10:   srcRow + // row index co
11:   srcCol + // extract and |
12: " } "
13: " return fb; } ";
14: return src;
```

GenerateRowCode(\mathcal{R})

```
1: srcInit = " "; src = " ";
2: if ( $\mathcal{R}_{structure} == Identity$ )
3:   srcInit = " if ( $\mathcal{R}_{pattern} \in r$ ) "+
4:   "   rowIndex++; ";
5: else if ( $\mathcal{R}_{structure} == Constraint$  ||  $\mathcal{R}_{structure} == Max$ )
6:   srcInit = " _index = 0; " +
7:   " for (key k  $\in$   $\mathcal{R}_{pattern}$ ) " +
8:   "   _index = r.IndexOf(k, _index); " +
9:   " _end = r.IndexOf( $\mathcal{R}_{delimiter}$ , _index); " +
10:  " _text = r.Substring(_index, _end); " +
11:  "   rowIndex = ParseInt(_text); ";
12: else if ( $\mathcal{R}_{structure} == Stack$ )
13:   srcInit = " _bList = []; _eList = []; " +
14:   " for (record r in br) { " +
15:   "   _index = 0; _end = 0; " +
16:   "   while (_index != 0) { " +
17:   "     _index = r.IndexOf( $\mathcal{R}_{pattern}[0]$ , _index);
18:   "     if(_index != 0) " +
19:   "       _blis.append(Pair(r.index, _index));
20:   "     while (_end != 0) { " +
21:   "       _end = r.IndexOf( $\mathcal{R}_{pattern}[1]$ , _end); " +
22:   "       if(_end != 0) " +
23:   "         _eList.append(Pair(r.index, _end));
24:   "     _rIndexes = []; _stack = Stack(); " +
25:   "     for (int i=0, j=0; i < min(len(_bList),
26:   "       if(_bList[i] < _eList[j]) _stack.push
27:   "       " +
28:   "       " +
29:   "       " +
```

GenerateColCode(\mathcal{V} , \mathcal{T})

```
1: srcInit = " "; src = " ";
2: trie = InitTrie( Root );
3: for ( column v  $\in$   $\mathcal{V}$ )
4:   Node node = new Node(  $\mathcal{V}_{key}$ ,  $\mathcal{V}_{colIndex}$ ,  $\mathcal{V}_{valueType}$  );
5:   trie.insert( node ); // node's key is a list of strings
6:   if  $\mathcal{T} >$  |trie.Root.GetChild()|
7:     if trie.GetHeight() == |trie.GetNodes()|
8:       src = GenerateCodeRegular( trie );
9:     else
10:      src = GenerateCodeTrie( trie.Root, src, "0" );
11:   else
12:     regexes = EmptySet(); map = EmptyMap();
13:     for ( column v  $\in$   $\mathcal{V}$ )
14:       regex = BuildRegex(  $v_{key}$  ); regexes.Add( regex );
15:       map.Put(  $v_{key}$ ,  $v_{colIndex}$  );
16:   srcInit = MapToString( map ); // convert map to string src
17:   src = GenerateCodeRegex( regexes );
18: return srcInit, src;
```


GenerateCodeTrie(Node node, String pos)

```
19: if ( node  $\in$  EndOfColPattern )
20:   src += " _end = FindEndPos(" + node.delimiter + "); " +
21:   " _text = r.Substring(" + pos + " , _end); " +
22:   " _val = Parse(_text, " + node.valType + "); " +
23:   " fb.set(rowIndex, " + node.cellIndex + " , _val); "
24: if ( |node.GetChild()| > 0 )
25:   for ( child in node.GetChild() )
26:     src += " index = r.IndexOf(" + child_key + " , " + pos + "); " +
27:     " if ( index != 0 ) { " +
28:     "   _newPos = _index+len(" + child_key + "); "
29:   GenerateCodeTrie(child, newPos);
```

Details are in
the paper!

Reader Generation Example by Nested Conditions

```
1:  _index = r.indexOf("#index", 0);
2:  if(_index != -1) {
3:    _index += 6;
4:    _end = r.length();
5:    _text = r.substring(_index, _end);
6:    fb.set(rowIndex, 1, Parse(_text, INT64));
7:  }
8:  _index = r.indexOf("#@", 0);
9:  if(_index != -1) {
10:   _index += 2;
11:   _end = r.indexOf(";", _index);
12:   _text = r.substring(_index, _end);
13:   fb.set(rowIndex, 2, _text);
14:   _index = r.indexOf(";", _end);
15:   if(_index != -1) {
16:     _index += 1;
17:     _end = r.indexOf(";", _index);
18:     _text = r.substring(_index, _end);
19:     fb.set(rowIndex, 3, _text);
20:     _index = r.indexOf(";", _index);
21:     if(_index != -1) {
22:       _index += 1;
23:       _end = r.length();
24:       _text = r.substring(_index, _end);
25:       fb.set(rowIndex, 3, _text);
26:     } } }
```

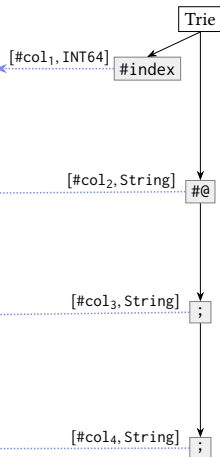

Pattern Creation

$\forall col \in \{1, 2, 3, 4\}, \mathcal{P}_{col} = LCS(l_1, l_2, l_3)$

$\mathcal{P}_{\#col_1} = [\#index]$

$\mathcal{P}_{\#col_2} = [\#@]$

$\mathcal{P}_{\#col_3} = [\#@, ;]$

$\mathcal{P}_{\#col_4} = [\#@, ;, ;]$

Delimiter Creation

Add all suffixes to Trie

$D_{\#col_1} = [\backslash n]$

$D_{\#col_2} = [;]$

$D_{\#col_3} = [;]$

$D_{\#col_4} = [\backslash n]$




Experiments – Experimental Setting

- **HW:** AMD EPYC 7302 CPU @ 3.0-3.3 GHz (32 cores) 128 GB DDR4 RAM
- **SW:** Ubuntu 20.04.1, OpenJDK 11, Python 3.8, and Clang++10
- **Datasets:**


Dataset	<i>n</i> (nrow)	<i>m</i> (ncol)	<i>o</i> (objects)	Size [GB]
AMiner-Author (JSON)	1,712,432	Nested	1	0.62
AMiner-Paper (JSON)	2,092,355	Nested	2	3.7
Yelp (JSON)	8,635,403	Nested	7	19
AMiner-Author (Custom)	1,712,432	N/A	N/A	0.5
AMiner-Paper (Custom)	2,092,355	N/A	N/A	2.1
HL7 (Custom)	10,240,000	100	N/A	7.5
Yelp-Review (CSV)	8,635,403	9	Flat	6.5
Mnist8m (LibSVM)	8,100,000	784	Flat	12
Susy (LibSVM)	5,000,000	18	Flat	2.4
Higgs (CSV)	11,000,000	28	Flat	7.5
Queen (MM)	4,147,110	4,147,110	Flat	4.5
ReWaste F (CSV)	1,953,434	313	Flat	1.2
ADF (XML)	10,000,000	146	20	41

- **Baselines:**  Apache SystemDS™     HL7  JSON4J

Reader Performance on Full Custom Datasets

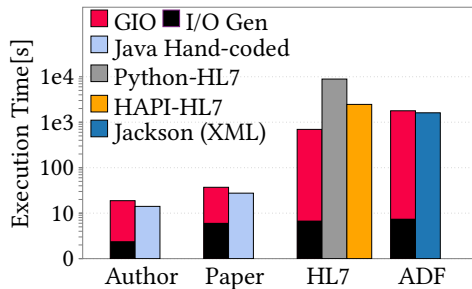

(a) Single-threaded Readers

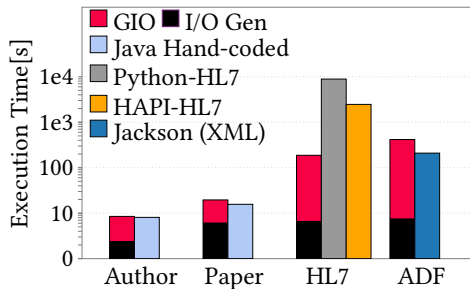


(b) Multi-threaded Readers


Micro-Benchmark Use Cases with Various Data/Query Characteristics

Q#	Dataset	Format	(Projection) Query	Nesting & Array
Q1	AMiner-Author	JSON	index	L1
Q2	AMiner-Author	JSON	name, paper_count	L1
Q3	AMiner-Author	JSON	index, name, paper_count, citation_number, hIndex	L1
Q4	AMiner-Author	JSON	name, affiliations[1, 2, 3, 4]	L1, L1 Array
Q5	AMiner-Paper	JSON	index	L1
Q6	AMiner-Paper	JSON	title, year	L1
Q7	AMiner-Paper	JSON	index, title, year, publication_venue, abstract	L1
Q8	AMiner-Paper	JSON	index, references[1, 2, 3, 4]	L1, L1 Array
Q9	Yelp	JSON	id	L1
Q10	Yelp	JSON	id, text	L1
Q11	Yelp	JSON	id, text, business.id, user.id, business.postal_code	L1, L2
Q12	Yelp	JSON	id, text, business.id, user.id, business.checkin.date, business.attribute.wifi	L1, L2, L3
Q13	Yelp	JSON	business.checkin.date, business.hours.monday, business.attribute.HhashTV	L3
Q14	AMiner-Author	Custom	index	N/A
Q15	AMiner-Author	Custom	name, paper_count	N/A
Q16	AMiner-Author	Custom	index, name, paper_count, citation_number, hIndex	N/A
Q17	AMiner-Author	Custom	name, affiliations[1, 2, 3, 4]	N/A
Q18	AMiner-Paper	Custom	index	N/A
Q19	AMiner-Paper	Custom	title, year	N/A
Q20	AMiner-Paper	Custom	index, title, year, publication_venue, abstract	N/A
Q21	AMiner-Paper	Custom	index, references[1, 2, 3, 4]	N/A
Q22	Yelp-Review	CSV	id	FLAT
Q23	Yelp-Review	CSV	id, text, stars	FLAT
Q24	HL7	Custom	evn_code, datetime, reason_code, operator_id	N/A
Q25	HL7	Custom	patient_name, birth_day, address, phone_number, account_number	N/A


Micro Benchmark - Reader Runtime Performance

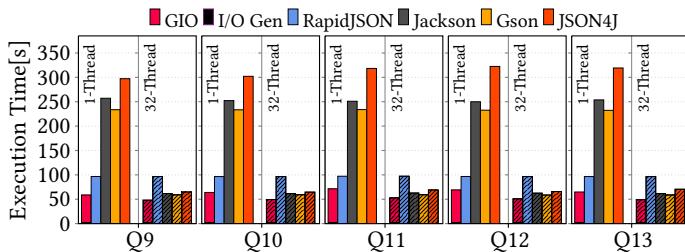

(a) Yelp (JSON)




(b) AMiner-Paper (Custom)

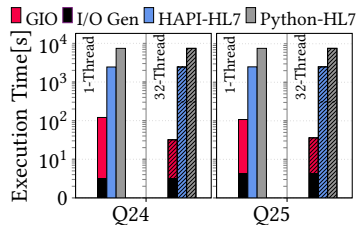


(c) HL7 (Custom)


Comparison with Varying Number of Attributes




(a) Yelp (JSON)




(b) AMiner Paper (Custom)



(c) Higgs (CSV)



(d) HL7 (Custom)



(e) Susy (LibSVM)

- ❑ RapidJSON is single-threaded and slow
- ❑ Projections are not exploited by SystemDS
- ❑ Python is doing projection, but it's still slow
- ❑ Python reads sparse formats slowly
- ❑ GIO linear scales and robust performance

Conclusions

■ Summary

- GIO (generated I/O) reader framework for custom text data formats
- GIO automatically identifies position/value mapping rules by giving samples
- Efficiently generates code for efficient, multi-threaded readers for datasets

■ Conclusion

- GIO is capable of **correctly** identifying the mapping rules
- Generated readers yield **competitive performance**
- GIO makes data analysis and modeling **easier** with custom data formats
- Users can adjust mapping rules and **readers manually**